

1 2 3 4 5 6 7 8 9


ANGLE	± 5°	REV	LOCAS	DESCRIPTION	DESIGN	DATE	卫国峰
X.XXX	± 0.05	01			DRAWN	DATE	尚伟
X.XX	± 0.15	02			CHECKED	DATE	吴汉学
X.X	± 0.25	03			AUDITED	DATE	龚劲松
X	± 0.50	04			APPROVED	DATE	eric

**Specifications/备注 (Remark)**

1-材料 (MATERIAL)  
 胶芯: PBT+30%G.F UL94V-0, 颜色: 黑色  
 Housing: PBT+30%G.F UL94V-0, Color: Black  
 四方针: 黄铜/镍底30u"MIN/表面镀金0.8u"MIN  
 Contact: Brass/0.8u"MIN GOLD PLATING  
 OVER ALL 30u"MIN NICKEL UNDERPLATING  
 OVER ALL

2-特性 (characteristics):  
 额定电流: 3 AMP  
 Raring Current: 3 AMP .  
 接触阻抗: 20mΩ MAX.  
 Contact Resistance: 20mΩ MAX .  
 绝缘阻抗: 1000MΩMIN.  
 Insulating Resistance: 1000MΩMIN.  
 耐电压: AC 500V.  
 Withstanding Voltage: AC 500V.  
 温度范围: -40度至+105度  
 Temperture Range: -40°Cto +105°C


PINS	A	B
4	6.98	3.81
6	9.52	6.35
8	12.06	8.89
10	14.60	11.43
12	17.14	13.97
14	19.68	16.51
16	22.22	19.05
18	24.76	21.59
20	27.30	24.13

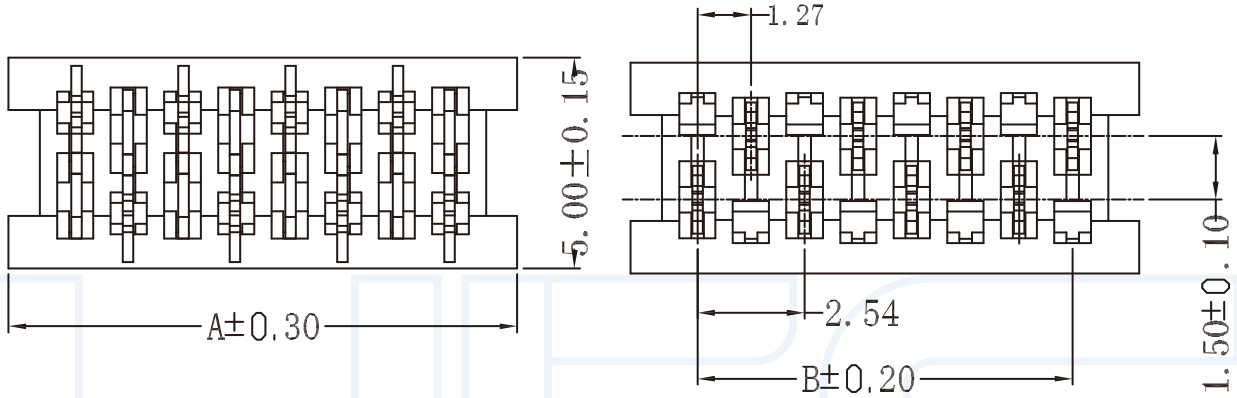

**ORDERING INFORMATION**

**56R- XX 1 40 XX A SN X**

NO.OF PINS PER ROW 04-20P  
 HEIGHT OF HOUSIGH 40:4.0mm 50:5.0mm  
 CONTACT SHAPE S:STRAIGHT R:RIGHT ANGLE  
 LATCH SHAPE: W:WITH LATCH N:WITHOUT LATCH  
 CONTACT PLATING FULL OF GOLD SEMI-GOLD A0=0.8u" B0=0.8U"  
 Contact Shape: S: Straight R: Right Angle  
 A9=30u" B9=30U"  
 S1=ORDINARY TIN PLATED  
 S2=MATTE TIN PLATED  
 S3=TIN-PLATED HIGH-TEMPERATURE

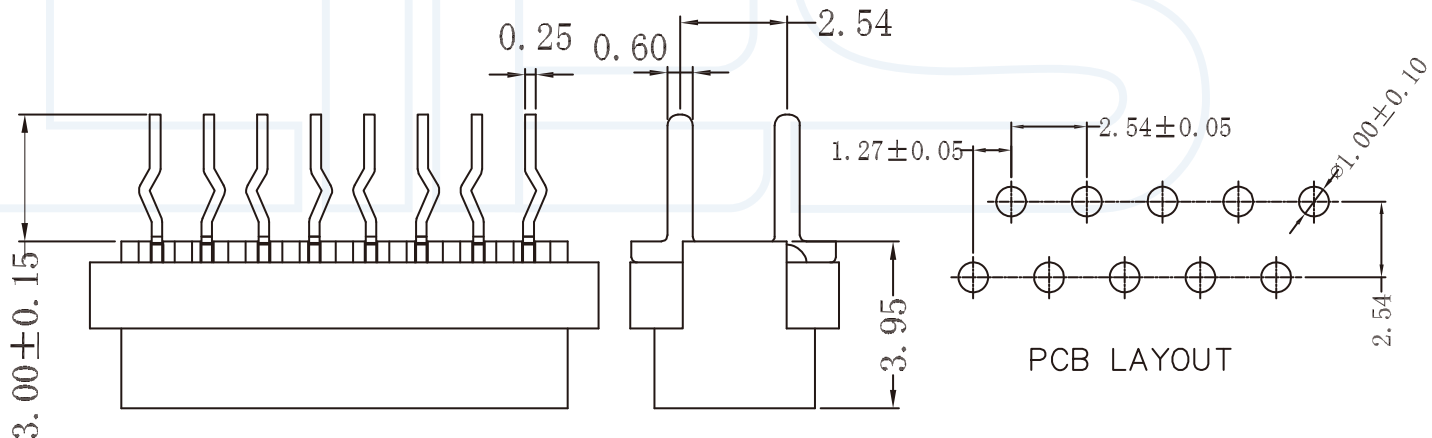

**YLIES** 东莞市瑞翔精密连接器有限公司  
 DONG GUAN YLIES PRECISE CONNECTOR CO.,LTD

Tel:0769-85381995 / Fax:0769-85493987 / Email: ylies@ylies.cn / Web:www.ylies.cn

TITLE 222-2.54mm 红色IDC-DIP型 MODEL DATE 2018-02-18

PROJECTON REV A UNIT mm SCALE 1:1 PAGE 1/1

PART NO: 56R-XX140XXASN1 DRAWING NO:

1 2 3 4 5 6 7 8 9